

The N-TRON® 108M12 is an IP67 rated unmanaged industrial Ethernet switch. It is housed in a hardened, metal, bulkhead mountable enclosure rated for protection against dust, low/high pressure water jets, and temporary immersion in water. This switch offers eight 10/100BaseTX ports with M12 D-coded connectors and is designed for use in mission critical data acquisition, control, and Ethernet I/O applications.

## PRODUCT FEATURES

- Unmanaged Operation
- IP67 Rated Hardened Metal Enclosure
- Bulkhead Mountable (Optional DIN-Rail mounting)
- Dustproof
- Protection against low/high pressure water jets
- Temporary immersion in water
- American Bureau of Shipping (ABS) Type Approval
- EN50155 for Railway applications
- Eight 10/100BaseTX Ports
- M12 D-Coded Female 4 Pin Connectors
- Extended Environmental Specifications
  - -40°C to 70°C Operating Temperature
  - >2M Hours MTBF
- Store-and-forward Technology
- Supports Full/Half Duplex Operation
- Up to 1.6 Gb/s Maximum Throughput
- MDIX Auto Sensing Cable
- Auto Sensing Speed and Flow Control
- Full Wire Speed Communications
- Redundant Power Inputs (10-30 VDC or 10-60 VDC)
- ESD Protection Diodes on all Ports
- Surge Protection Diodes on Power Inputs
- LED Link/Activity Status Indication

## PRODUCT OVERVIEW

The 108M12 industrial IP67 rated Ethernet switch is designed to solve the most demanding industrial communications requirements while providing high throughput and minimum downtime.

The 108M12 provides eight auto sensing 10/100BaseTX ports with M12, D-coded, 4 pin, female, style connectors. All ports are full/half duplex capable, using "state of the art" Ethernet switching technology. The 108M12 auto-negotiates the speed and flow control capabilities of the eight TX port connections, and configures itself automatically.

Since the 108M12 is auto sensing, there will be no need to make extensive wiring changes if upgrades are made to the host computers, plant systems, or Ethernet I/O modules.



The switching fabric simply scales up or down automatically to match specific network environments.

The 108M12 supports up to 2,000 MAC addresses, enabling these products to support extremely sophisticated and complex network architectures.

For applications requiring IP67 protection, the 108M12 is an ideal candidate for upgrading existing hubs and repeaters to increase bandwidth and determinism by virtually eliminating network collisions. The 108M12 is an affordable network solution and maintains the plug & play simplicity of the unmanaged hub.

The 108M12 can simplify plant wiring by eliminating the need to bring data acquisition and control network connections back to a climate controlled environment. The 108M12 has extended operating environmental specifications to meet the harsh needs of industrial environments. For cost savings and convenience this network switch can be bulkhead or DIN-Rail mounted alongside other waterproof industrial equipment.

To increase reliability the 108M12 provides dual redundant power inputs of 10-30 VDC or 10-60 VDC with high voltage option. LEDs are provided to display the link status and activity of each port.

## BENEFITS

### Industrial Network Switch

- IP65, IP66, and IP67 Protection
- Hardened Metal Bulkhead Mountable Enclosure (Optional DIN-Rail mount available)
- Extended Environmental Specifications
- High Performance
- High MTBF >2M Hours
- ESD Protection Diodes on all Ports
- Surge Protection Diodes on Power Inputs

### Ease of Use

- Plug & Play Operation
- Auto Sensing 10/100BaseTX
- Auto Negotiation Full/Half Duplex
- MDIX Auto Cable Sensing
- Unmanaged Operation

### Increased Performance

- Full Wire Speed Capable
- Full Duplex Capable
- Eliminates Network Collisions
- Increases Network Determinism

## 108M12 SPECIFICATIONS

### Case Dimensions

Height:	6.7"	(16.9 cm)
Width:	6.7"	(16.9 cm)
Depth:	1.8"	(4.6 cm)
Weight:	3.3lbs.	(1.5 kg)

### Electrical

Input Voltage:	10-30 VDC Steady Input
Current:	250mA @ 24V
Inrush:	8.1Amp/0.7ms@24V

### Environmental

Operating Temperature:	-40°C to 70°C
Storage Temperature:	-40°C to 85°C
Operating Humidity:	5% to 100% (Non Condensing)
Operating Altitude:	0 to 10,000 ft.

### Reliability

MTBF:	>2 Million Hours
-------	------------------

### Network Media

10BaseT:	>Cat3 Cable
100BaseTX:	>Cat5 Cable

### Connectors

10/100BaseTX:	Eight (8) M12 D-Coded 4 Pin Female Ports
Power:	One (1) M12 A-Coded 5 Pin Male Port

### Recommended Wiring Clearance

Front:	~4" (10.16 cm)
--------	----------------

### Ordering Information

108M12	Eight 10/100BaseTX Ports with M12 D-Coded Style Connectors, 10-30 VDC
CAT5E-M12-M12-X	Cat5E STP Cable with Straight M12 to Straight M12 Connector, Shielded
CAT5E-M12-RJ45-X	Cat5E STP Cable with Straight M12 to RJ-45 Connector, Shielded
CAT5E-M12-X	Cat5E STP Cable with Straight M12 Connector to bare end, Shielded
CAT5E-RM12-M12-X	Cat5E STP Cable with 90° M12 to Straight M12 Connector, Shielded
CAT5E-RM12-RM12-X	Cat5E STP Cable with 90° M12 to 90° M12 Connector, Shielded
CAT5E-RM12-RJ45-X	Cat5E STP Cable with 90° M12 to RJ-45 Connector, Shielded
CAT5E-RM12-X	Cat5E STP Cable with 90° M12 to bare end, Shielded
NTPS-48-2	DIN-Rail Power Supply 48V@2 Amp
PWR-M12-A-X	Power Cable, M12 A-Coded 90° Female Connector to bare end, Shielded
PWR-RM12-A-X	Power Cable, M12 A-Coded Straight Female Connector to bare end, Shielded

### Where:

X = length of cable, fill in desired amount in feet.  
Ex: CAT5E-RM12-10 (for a 10ft cable)

### Regulatory Approvals: 108M12

FCC Title 47 Part 15 Class A

ICES-003- Class A

CE: EN61000-6-2:2001; ,EN61000-6-4:2001

EN61000-4-2,3,4,5,6

EN55011:1998+A1: 1999+A2: 2002 - Class A

UL Listed (US and Canada) 1604, ANSI/ISA-12.12.01-2000 Class I, Div 2, Groups A,B,C,D,T4A;

ABS Type Approval for Shipboard Applications

DNV Type Approval Certification

EN50155 for Railway Applications

GOST-R Certified; RoHS Compliant

Designed to comply with:

IEEE 1613 for Electric Utility Substations

NEMA TS1/TS2 for Traffic Control Equipment

## Contact Information

Secure online  
ordering  
24/7/365 from

**B & B electronics**  
MANUFACTURING COMPANY

International Headquarters: 707 Dayton Road - PO Box 1040 - Ottawa, IL 61350 USA  
815-433-5100 Fax 815-433-5104 [www.bb-elec.com](http://www.bb-elec.com) [orders@bb-elec.com](mailto:orders@bb-elec.com) [support@bb-elec.com](mailto:support@bb-elec.com)

European Headquarters: Westlink Commercial Park - Oranmore Co. Galway - Ireland  
+353 91 792444 Fax +353 91 792445 [www.bb-europe.com](http://www.bb-europe.com) [orders@bb-europe.com](mailto:orders@bb-europe.com) [support@bb-europe.com](mailto:support@bb-europe.com)


# N-TRON

THE INDUSTRIAL NETWORK COMPANY

QUALITY MANAGEMENT SYSTEM

CERTIFIED BY DNV

ISO 9001:2000

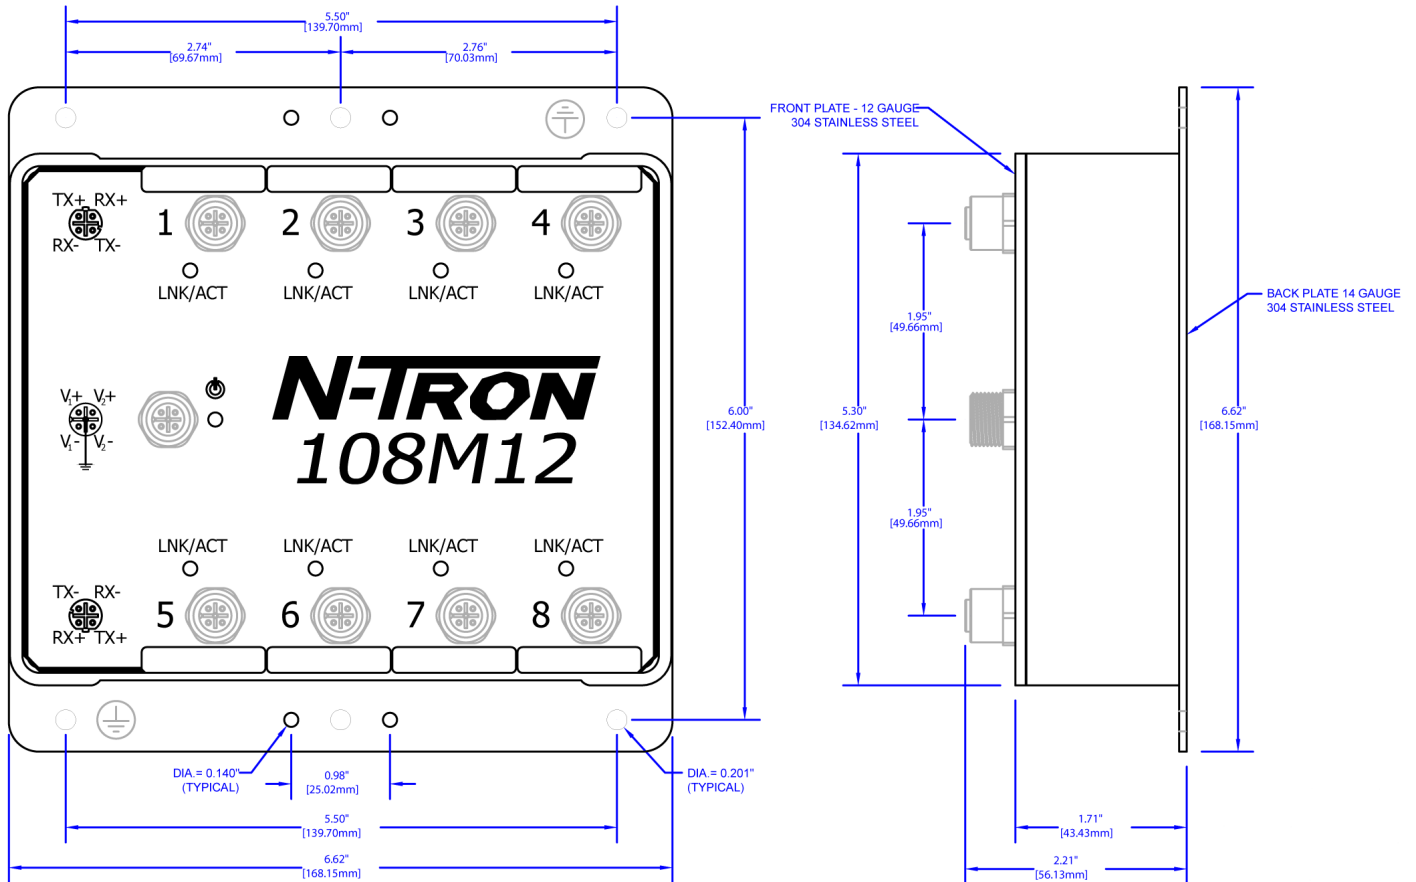

Secure online ordering 24/7/365 from **B & B electronics** MANUFACTURING COMPANY

International Headquarters: 707 Dayton Road - PO Box 1040 - Ottawa, IL 61350 USA  
815-433-5100 Fax 815-433-5104 [www.bb-elec.com](http://www.bb-elec.com) [orders@bb-elec.com](mailto:orders@bb-elec.com) [support@bb-elec.com](mailto:support@bb-elec.com)

European Headquarters: Westlink Commercial Park - Oranmore Co. Galway - Ireland  
+353 91 792444 Fax +353 91 792445 [www.bb-europe.com](http://www.bb-europe.com) [orders@bb-europe.com](mailto:orders@bb-europe.com) [support@bb-europe.com](mailto:support@bb-europe.com)