

MiniMc TP-TX/FX

MiniMc TP-TX/SFP

Operation Manual



B+B SMARTWORX 

FCC Radio Frequency Interference Statement

This equipment has been tested and found to comply with the limits for a Class B computing device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which the user will be required to correct the interference at his own expense.

Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

The use of non-shielded I/O cables may not guarantee compliance with FCC RFI limits. This digital apparatus does not exceed the Class B limits for radio noise emission from digital apparatus set out in the Radio Interference Regulation of the Canadian Department of Communications.

Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de classe B prescrites dans le Règlement sur le brouillage radioélectrique publié par le ministère des Communications du Canada.

Limited Lifetime Warranty

Effective for products of B+B SmartWorx shipped on or after May 1, 2013, B+B SmartWorx warrants that each such product shall be free from defects in material and workmanship for its lifetime. This limited lifetime warranty is applicable solely to the original user and is not transferable.

This warranty is expressly conditioned upon proper storage, installation, connection, operation and maintenance of products in accordance with their written specifications.

Pursuant to the warranty, within the warranty period, B+B SmartWorx, at its option will:

1. Replace the product with a functional equivalent;
2. Repair the product; or
3. Provide a partial refund of purchase price based on a depreciated value.

Products of other manufacturers sold by B+B SmartWorx are not subject to any warranty or indemnity offered by B+B SmartWorx, but may be subject to the warranties of the other manufacturers.

Notwithstanding the foregoing, under no circumstances shall B+B SmartWorx have any warranty obligations or any other liability for: (i) any defects resulting from wear and tear, accident, improper use by the buyer or use by any third party except in accordance with the written instructions or advice of the B+B SmartWorx or the manufacturer of the products, including without limitation surge and overvoltage conditions that exceed specified ratings, (ii) any products which have been adjusted, modified or repaired by any party other than B+B SmartWorx or (iii) any descriptions, illustrations, figures as to performance, drawings and particulars of weights and dimensions contained in the B+B SmartWorx' catalogs, price lists, marketing materials or elsewhere since they are merely intended to represent a general idea of the products and do not form part of this price quote and do not constitute a warranty of any kind, whether express or implied, as to any of the B+B SmartWorx' products.

THE REPAIR OR REPLACEMENT OF THE DEFECTIVE ITEMS IN ACCORDANCE WITH THE EXPRESS WARRANTY SET FORTH ABOVE IS B+B SMARTWORX' SOLE OBLIGATION UNDER THIS WARRANTY. THE WARRANTY CONTAINED IN THIS SECTION SHALL EXTEND TO THE ORIGINAL USER ONLY, IS IN LIEU OF ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, AND ALL SUCH WARRANTIES AND INDEMNITIES ARE EXPRESSLY DISCLAIMED, INCLUDING WITHOUT LIMITATION (I) THE IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND OF MERCHANTABILITY AND (II) ANY WARRANTY THAT THE PRODUCTS ARE DO NOT INFRINGE OR VIOLATE THE INTELLECTUAL PROPERTY RIGHTS OF ANY THIRD PARTY. IN NO EVENT SHALL B+B SMARTWORX BE LIABLE FOR LOSS OF BUSINESS, LOSS OF USE OR OF DATA INTERRUPTION OF BUSINESS, LOST PROFITS OR GOODWILL OR OTHER SPECIAL, INCIDENTAL, EXEMPLARY OR CONSEQUENTIAL DAMAGES. B+B SMARTWORX SHALL DISREGARD AND NOT BE BOUND BY ANY REPRESENTATIONS, WARRANTIES OR INDEMNITIES MADE BY ANY OTHER PERSON, INCLUDING WITHOUT LIMITATION EMPLOYEES, DISTRIBUTORS, RESELLERS OR DEALERS OF B+B SMARTWORX WHICH ARE INCONSISTENT WITH THE WARRANTY, SET FORTH ABOVE.

Table of Contents

FCC Radio Frequency Interference Statement i
Limited Lifetime Warranty i
About the MiniMc..... 1
Installing the MiniMc..... 1
DIN Rail Mounting..... 1
Powering the MiniMc..... 2
LED Operation..... 2
Specifications 2
Fiber Optic Cleaning Guidelines 3
Electrostatic Discharge Precautions 3
Safety Certifications..... 4

About the MiniMc

The MiniMc is a 10/100 Auto Negotiating miniature media converter. It is available in a fixed optical 1x9 transceiver version, dual or single strand, as well as an SFP version. The optical transceiver port always operates at 100 Mbps full duplex. The copper port auto-senses the connected device's speed (10Mbps or 100Mbps) and duplex mode (HDX or FDX including Flow Control). The MiniMc offers plug-and-play operation, including the AutoCross MDI/MDIX feature which automatically corrects for errors in cable selection making the distinction between a "straight through" cable and a "crossover" cable unimportant. The MiniMc allows jumbo packets of up to 1916 bytes.

Installing the MiniMc

The MiniMc can be installed in an B+B SmartWorx PowerTray/18 (B+B SmartWorx P/N 850-13086) or used as a standalone converter. The MiniMc installs virtually anywhere: as a standalone, table-top device or on a DIN rail. As a standalone device, install MiniMc in locations with extremely limited space. Also included, are Velcro strips to attach the device to most surfaces. A PowerTray/18 is available for high density applications.

Powering the MiniMc

As a standalone converter the MiniMc can be powered by the supplied AC/DC wall adapter, or an optional USB power cable (B+B SmartWorx P/N 806-39628) for use with high power USB host ports.

DIN Rail Mounting

The MiniMc can be mounted with two DIN Rail clips, a hardware option available through B+B SmartWorx. The DIN Rail clips include screws, to allow the installation onto a DIN Rail. Install the screws into DIN Rail clips, which should be mounted perpendicular to the DIN Rail. Snap the converter onto the clips. To remove the converter from the DIN Rail, use a flat-head screwdriver into the slot to gently pry the converter from the rail.



NOTE
The DIN clips are designed for use on a DIN-35 rail.


Powering the MiniMc

The MiniMc includes multiple powering options:

- A country-specific, high-reliability AC power adapter (included)
- IE-PowerTray/18 for Rack Mounting

LED Operation

Each MiniMc includes two LEDs, located on the RJ-45 connector. LED functions are as follows:

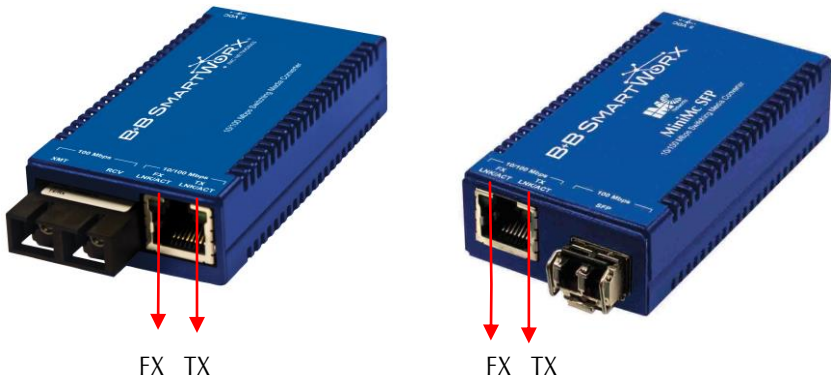

FX LNK/ACT	Glows green when a link is established on the fiber port; blinks green when activity is detected on the fiber port.
TX LNK/ACT	Glows green when a link is established on the copper port; blinks green when activity is detected on the copper port.

Specifications

AC Wall Adapter

100 to 240 \pm 10% VAC input, 5 VDC output, 2A max.

Operating Temperature

+14°F to +122°F (-10°C to +50°C)

Storage Temperature

-31°C to +167° F (-35°C to +75°C)

Humidity:

5% to 95% (non-condensing), 0 – 10,000 ft. altitude

Input Power Consumption (Typical, varies with optical transceiver type)

500mA@5 VDC

Dimensions

0.83"H x 1.80"W x 3.35"D (2.11 x 4.57 x 8.51 cm)

NOTE
<i>Use only the supplied B+B SmartWorx wall adapter or USB cable with this product. Using a non-B+B SmartWorx power source will void the warranty.</i>

Fiber Optic Cleaning Guidelines

Fiber Optic transmitters and receivers are extremely susceptible to contamination by particles of dirt or dust, which can obstruct the optic path and cause performance degradation. Good system performance requires clean optics and connector ferrules.

1. Use fiber patch cords (or connectors, if you terminate your own fiber) only from a reputable supplier; low-quality components can cause many hard-to-diagnose problems in an installation.
2. Dust caps are installed at B+B SmartWorx to ensure factory-clean optical devices. These protective caps should not be removed until the moment of connecting the fiber cable to the device. Should it be necessary to disconnect the fiber device, reinstall the protective dust caps.
3. Store spare caps in a dust-free environment such as a sealed plastic bag or box so that when reinstalled they do not introduce any contamination to the optics.
4. If you suspect that the optics have been contaminated, alternate between blasting with clean, dry, compressed air and flushing with methanol to remove particles of dirt.

Electrostatic Discharge Precautions

Electrostatic discharge (ESD) can cause damage to any product, add-in modules or stand alone units, containing electronic components. Always observe the following precautions when installing or handling these kinds of products

1. Do not remove unit from its protective packaging until ready to install.
2. Wear an ESD wrist grounding strap before handling any module or component. If the wrist strap is not available, maintain grounded contact with the system unit throughout any procedure requiring ESD protection.
3. Hold the units by the edges; do not touch the electronic components or gold connectors.
4. After removal, always place the boards on a grounded, static-free surface, ESD pad or in a proper ESD bag. Do not slide the modules or stand alone units over any surface.



WARNING! Integrated circuits and fiber optic components are extremely susceptible to electrostatic discharge damage. Do not handle these components directly unless you are a qualified service technician and use tools and techniques that conform to accepted industry practices.

Safety Certifications


UL/CUL: Listed to Safety of Information Technology Equipment, including Electrical Business Equipment.

CE: The products described herein comply with the Council Directive on Electromagnetic Compatibility (2004/108/EC) and the Council Directive on Electrical Equipment Designed for use within Certain Voltage Limits (2006/95/EC). Certified to Safety of Information Technology Equipment, Including Electrical Business Equipment. For further details, contact B+B SmartWorx.



**Class 1 Laser product, Luokan 1 Laserlaite,
Laser Klasse 1, Appareil A' Laser de Classe 1**

European Directive 2002/96/EC (WEEE) requires that any equipment that bears this symbol on product or packaging must not be disposed of with unsorted municipal waste. This symbol indicates that the equipment should be disposed of separately from regular household waste. It is the consumer's responsibility to dispose of this and all equipment so marked through designated collection facilities appointed by government or local authorities. Following these steps through proper disposal and recycling will help prevent potential negative consequences to the environment and human health. For more detailed information about proper disposal, please contact local authorities, waste disposal services, or the point of purchase for this equipment.





International Headquarters

B+B SmartWorx
707 Dayton Road
Ottawa, IL 61350 USA

Phone (815) 433-5100 — **General Fax** (815) 433-5105

Email: support@bb-smartworx.com

Website: www.bb-smartworx.com

European Headquarters

B+B SmartWorx
Westlink Commercial Park
Oranmore, Co. Galway, Ireland

Phone +353 91-792444 — **Fax** +353 91-7924455

Email: techSupport@bb-smartworx.com

Website: www.bb-smartworx.com

**ISO 9001:2008
REGISTERED**



© 2013 B+B SmartWorx. All rights reserved.

The information in this document is subject to change without notice. B+B SmartWorx assumes no responsibility for any errors that may appear in this document. MiniMc is a trademark of B+B SmartWorx. Other brands or product names may be trademarks and are the property of their respective companies.

MiniMc-TP-TXFX_SFP_4115m